




CHARGE M3 T2P/T2C S



Info

- For electric vehicles with type 2 vehicle inlet

CHARGE M3 T2P/T2C C

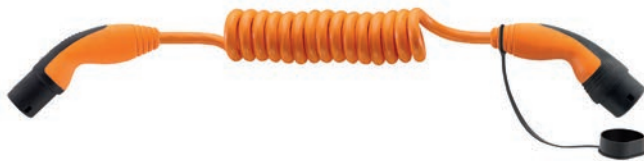

Info

- For electric vehicles with type 2 vehicle inlet

CHARGE M3 T2P/T2C H



Info

- For electric vehicles with type 2 vehicle inlet

Benefits

- Resistant to microbes
- Resistant to oil, dust and water
- Special cable design for a long service life
- Flexible at low temperatures
- Withstands high mechanical stress, in particular abrasion and sliding demands

Application range

- For charging stations, electric and Plug-in Hybrid vehicles

Product Make-up

- Cable for 1-phase charging up to 20A: ÖLFLEX® Charge 3G2.5 mm²+1x0.5 mm²
- Cable for 3-phase charging up to 20A: ÖLFLEX® Charge 5G2.5mm²+1x0.5mm²
- Cable for 1-phase charging up to 32A: ÖLFLEX® Charge 3G6mm²+1x0,5mm²
- Cable for 3-phase charging up to 32 A: ÖLFLEX® Charge 5G6mm²+1x0.5mm²
- Type 2 connectors are injection moulded in two-components process for optimal ergonomics

Technical data

ETIM ETIM 5.0 Class-ID: EC002839
ETIM 5.0 Class-Description: Accessories for battery/charger

DIN VDE **Certifications** according to VDE-AR-E2283-5 according to EN 61851-1

Temperature range Flexing: -30°C to +50°C

| Article number | Version | Effective length (mm) | Copper index kg/1.000 pieces | Weight (kg/1000 pieces) | PU |
|--|-----------------------|-----------------------|------------------------------|-------------------------|----|
| Plug type 2, charging cable, vehicle connector type 2 | | | | | |
| 74880153 | Charging: 1 phase 20A | 5000 | 409 | 1740 | 1 |
| 74880167 | Charging: 1 phase 20A | 7000 | 562 | 2060 | 1 |
| 74880169 | Charging: 3 phase 20A | 5000 | 665 | 2280 | 1 |
| 74880170 | Charging: 3 phase 20A | 7000 | 915 | 2800 | 1 |
| 74880160 | Charging: 1 phase 32A | 5000 | 947 | 2620 | 1 |
| 74880161 | Charging: 1 phase 32A | 7000 | 1303 | 3260 | 1 |
| 74880164 | Charging: 3 phase 32A | 5000 | 1559 | 3360 | 1 |
| 74880092 | Charging: 3 phase 32A | 7000 | 2145 | 4280 | 1 |
| Plug type 2, Charging cable spiralsised, Vehicle connector type 2 | | | | | |
| 74880168 | Charging: 1 phase 20A | 5000 | 1000 | 2940 | 1 |
| 74880158 | Charging: 3 phase 20A | 5000 | 1740 | 4520 | 1 |
| 74880162 | Charging: 1 phase 32A | 5000 | 2460 | 5340 | 1 |
| Plug type 2, charging cable Helix, vehicle connector type 2 | | | | | |
| 74880159 | Charging: 3 phase 20A | 5000 | 734 | 2220 | 1 |
| 74880163 | Charging: 1 phase 32A | 5000 | 1045 | 2700 | 1 |

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request. Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges. Photographs are not to scale and do not represent detailed images of the respective products. Further colour combinations and lengths on request